

## SLIMLINK LED LINKABLE LINEAR FIXTURE



Frosted Lens



### PRODUCT SPECIFICATIONS

<b>WATTAGES</b>	4ft: 22/30/40W selectable 2ft: 10/15/20W selectable (special order)
<b>COLOR TEMPS</b>	30/40/50/57/65K selectable
<b>INPUT VOLTAGE</b>	AC 120/277V
<b>EFFICACY</b>	150 lm/W
<b>BEAM ANGLE</b>	120°
<b>CRI</b>	82
<b>OPERATING TEMP</b>	-4°F to 113°F
<b>LED LIFESPAN (L70)</b>	50,000 hours
<b>RATED</b>	IP20
<b>LISTED</b>	ETL
<b>LENS</b>	Frosted
<b>WARRANTY</b>	5 year

### PART NUMBERS

ZL-SLIM-4FT-40/30/22W-FA-BL

ZL-SLIM-2FT-20/15/10W-FA-BL

## INSTALLATION OF LINKING

Max of 600W for linking applications at 120V  
Max of 1200W for linking applications at 277V

When you need to Integrate Linking in different sizes, please refer to below:

Size	Wattage	Linkable Qty @120V PCS	Linkable Qty @277V PCS
<b>2ft</b> (special order)	20W	30	60
	15W	40	80
	10W	60	120
<b>4ft</b>	40W	15	30
	30W	20	40
	22W	27	54

2ft	4ft
40W	20W
30W	15W
22W	10W




# SLIMLINK LED LINKABLE LINEAR FIXTURE



Slide Switch for CCT Selection



Slide Switch for Wattage Selection

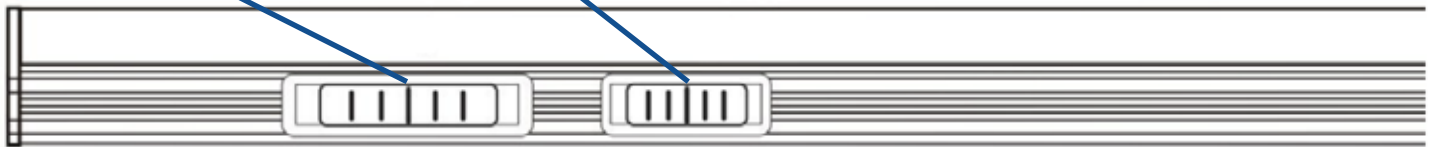

## SLIMLINK LED LINKABLE LINEAR FIXTURE



### ACCESSORIES - INCLUDED WITH 4FT SLIM FIXTURE:



6ft On/Off Cable



Single-end Cable



Double-end Cable

### MOUNTING ACCESSORIES - SOLD SEPARATELY



Magnet Clips

**ZL-SLIM-MC-MAG**



Mounting Clips - No Magnets

**ZL-SLIM-MC-NM**



Coupling Connector

**ZL-SLIM-BC**

