

## HIGH OUTPUT LED PAR LAMPS



PAR30



PAR30



PAR38



PAR30 / PAR38



### APPLICATIONS

- Foyer
- Vestibules
- Hospitality
- High ceilings
- Houses of worship
- Artwork lighting
- Mood lighting

### PRODUCT FEATURES

<b>WATTAGES</b>	PAR30: 35W PAR38: 55W
<b>COLOR TEMPS</b>	27K, 30K, 35K, 40K, 45K, 50K, 55K, 60K, 65K
<b>INPUT VOLTAGE</b>	120V, 120-277V
<b>LED CHIP</b>	Osram
<b>CRI</b>	85
<b>RATED</b>	IP20
<b>LISTED</b>	UL
<b>WARRANTY</b>	3 year
<b>HOUSING</b>	White, Optional Black
<b>BASE TYPE</b>	E26
Micro Fan for active cooling	

### SPECIFICATIONS

	WATTAGES	BEAM SPREAD	DIMENSIONS (WxL)	LUMENS (+/-10%)
PAR 30	35W	15, 25, 45, 60, 80	3.74" x 4.72"	2,800 - 3,100
PAR 38	55W	15, 25, 45, 60, 80	4.72" x 5.23"	4,600 - 5,400


### PRODUCT BUILDER

ex: PAR-30V-HO-E26-35W-40K-120V-15-DIM-WH


PRODUCT #	BASE TYPE	WATTAGE	COLOR TEMP	VOLTAGE INPUT	BEAM SPREAD	DIMMING	HOUSING
<input type="text"/>	<input type="text" value="E26"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
PAR30V-HO PAR38V-HO	PAR30 PAR38	35=35W 55=55W	27K 30K 35K 40K 45K 50K 55K 60K 65K	120V 120-277V	15 25 45 60 80	DIM - Only 120V is dimnable	WH=White BK=Black (Optional)

## HIGH OUTPUT LED PAR LAMPS

### 35W LED PAR30

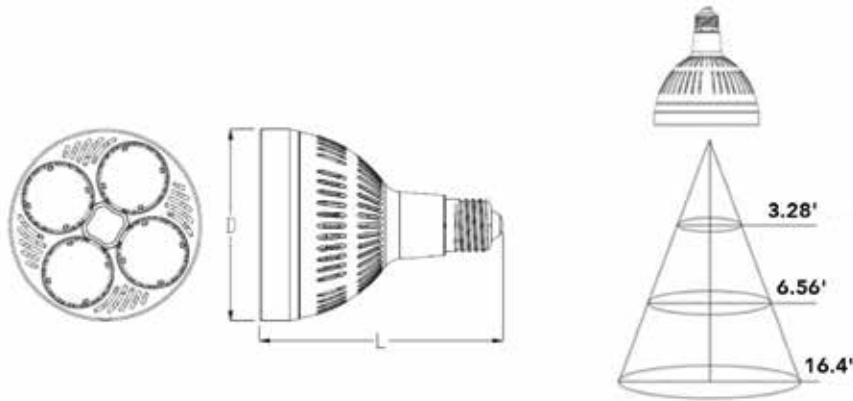


### LIGHT DISTRIBUTION

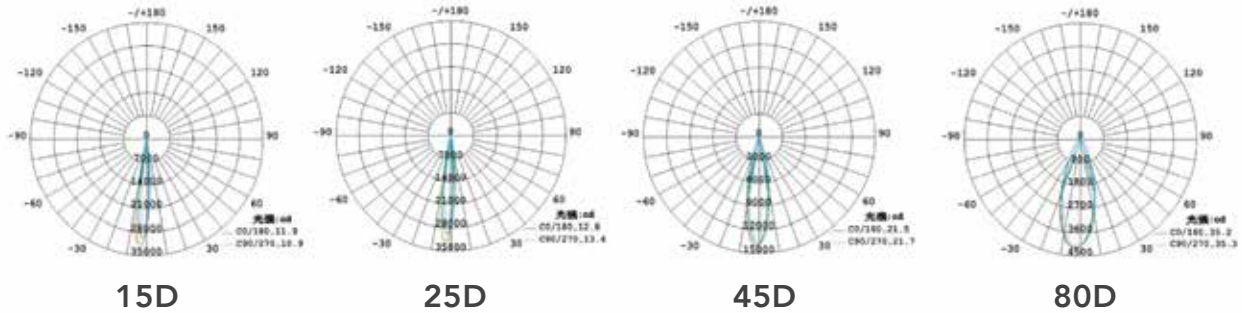


Height / Angle	15°		25°		45°		80°	
	Foot Candles	Spot Size	Foot Candles	Spot Size	Foot Candles	Spot Size	Foot Candles	Spot Size
3.28' (1 Meter)	3732	0.66'	3064	0.72'	1330	1.25'	393	2.07'
6.56' (2 Meter)	933	1.35'	765	1.48'	322	2.49'	98	4.13'
9.84' (3 Meter)	414	2.00'	340	2.20'	147	3.71'	43	6.20'
13.12' (4 Meter)	233	2.69'	57	2.85'	49	5.22'	19	8.96'
16.4' (5 Meter)	149	3.35'	122	3.67'	53	6.20'	15	10.33'

# HIGH OUTPUT LED PAR LAMPS

## 55W LED PAR38

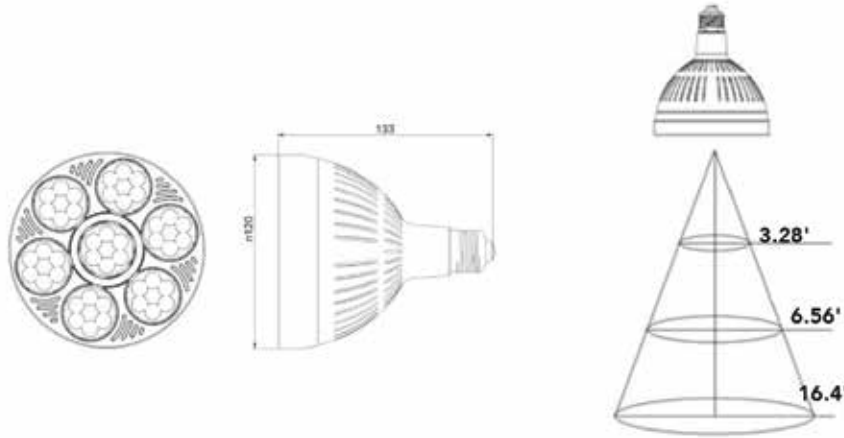

### LIGHT DISTRIBUTION

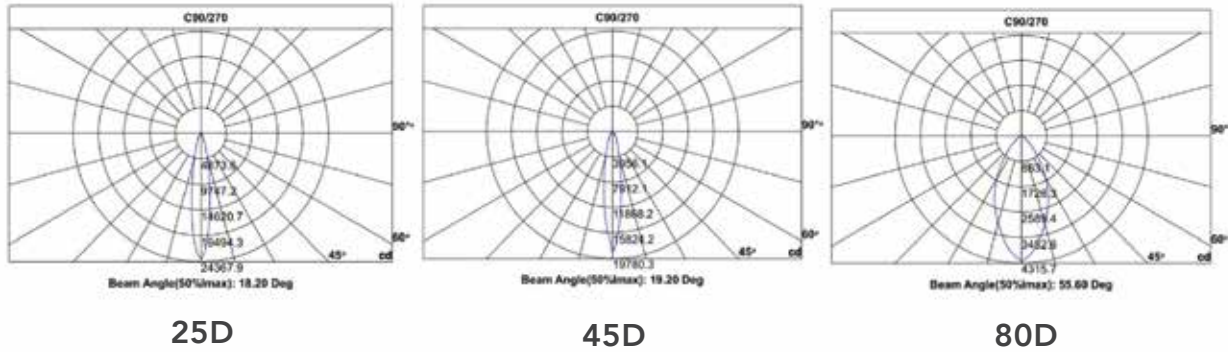

Height / Angle	15°		25°		45°		80°	
	Foot Candles	Spot Size	Foot Candles	Spot Size	Foot Candles	Spot Size	Foot Candles	Spot Size
3.28' (1 Meter)	3623	0.84'	2263	1.05'	1837	1.12'	400	3.44'
6.56' (2 Meter)	905	1.68'	574	2.10'	459	3.6'	114	6.33'
9.84' (3 Meter)	402	5.53'	251	3.31'	204	5.5'	44	9.45'
13.12' (4 Meter)	144	3.37'	143	4.1'	89	7.2'	28	12.7'
16.4' (5 Meter)	100	4.21'	96	5.12'	59	9.1'	19	15.92'